


# Smart-PAK Main Board Wiring Diagram

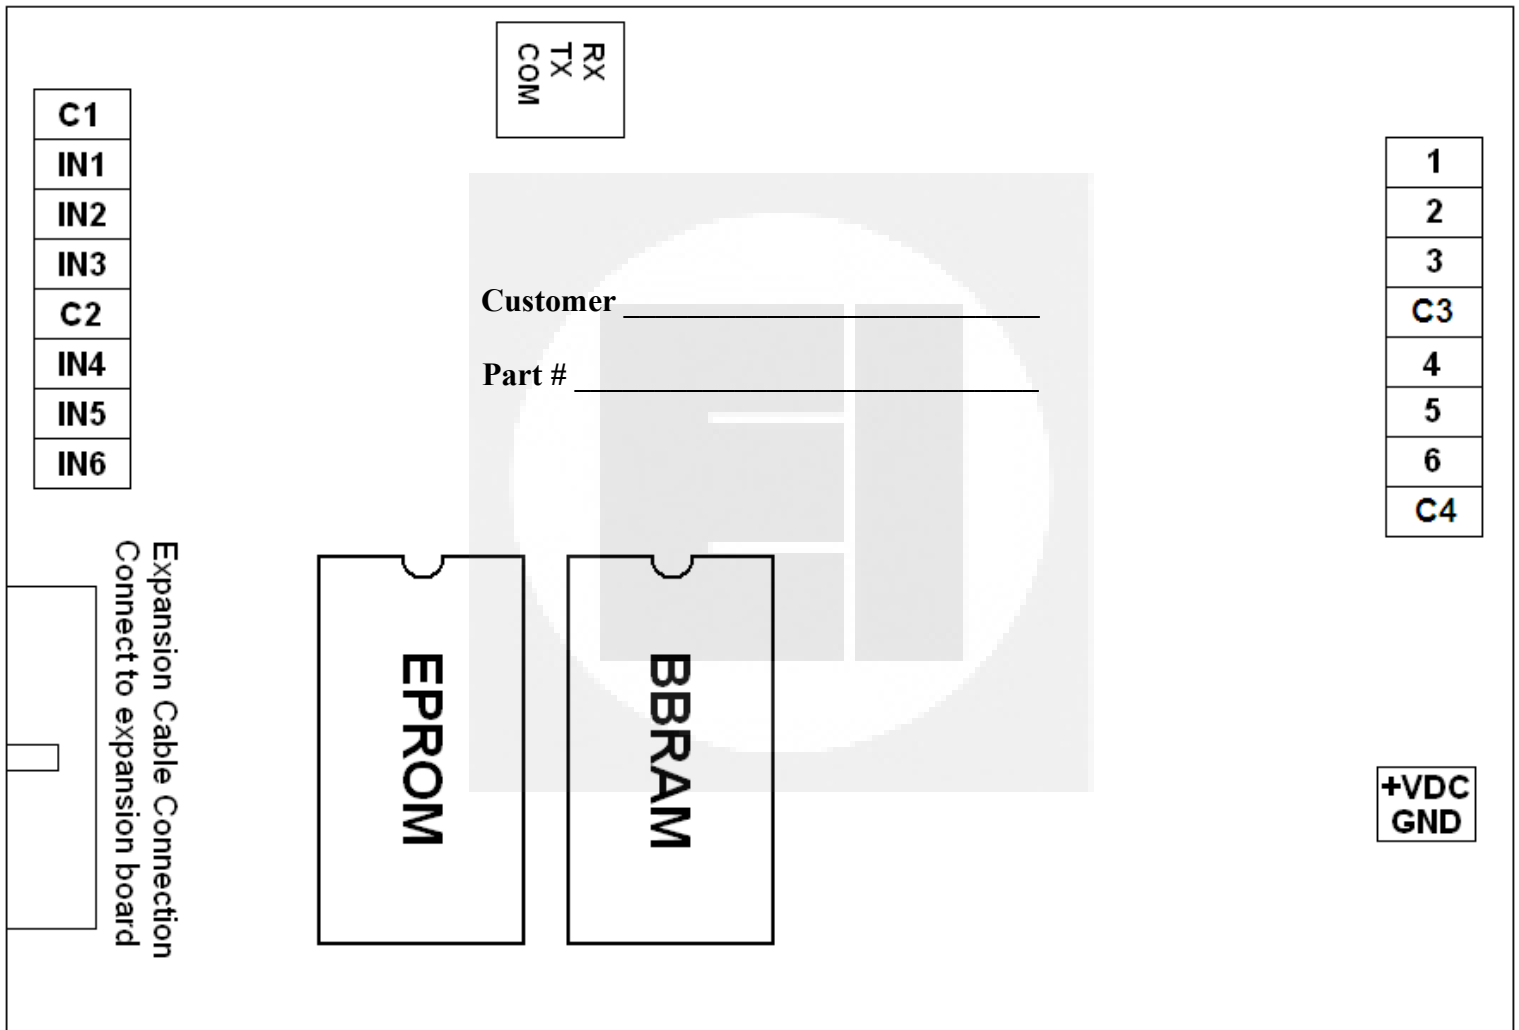

<b>Power</b>	12 or 24VDC (Configured from factory, Check voltage on power terminal)
<b>Digital Inputs</b>	NPN = +Voltage applied to common, -Voltage connected to input (Standard configuration) PNP = -Voltage applied to common, +Voltage connected to input (When requested, Configured from factory)
<b>Digital Outputs</b>	Voltage is applied to common and is switched to the related output terminal Out1-3 (C3) and Out4-6 (C4)

<b>Digital Inputs 1-3 =</b>	
<b>Digital Inputs 4-6 =</b>	
<b>Special Notes:</b>	

<b>Dimensions</b>	W = 6.50" , H = 4.50"
-------------------	-----------------------



**ENTERTRON INDUSTRIES INC.**  
*Specializing in PLCs for OEMs since 1978*

3857 Orangeport Rd, Gasport NY 14067  
 Phone (716)772-7216 Web [www.entertron.com](http://www.entertron.com) E-Mail [plcs@entertron.com](mailto:plcs@entertron.com)